

Final report, Ongoing Key Comparison BIPM.QM-K1, Ozone at ambient level, comparison with VSL, (April 2024)

Joële Viallon^{1*}, Philippe Moussay¹, Faraz Idrees¹, Robert Wielgosz¹, Luuk Meijer² and Adriaan van der Veen²

¹ BIPM (Bureau International des Poids et Mesures), Pavillon de Breteuil, F-92312 Sèvres, France

² VSL (Van Swinden Laboratorium), Thijsseweg 11, 2629 JA, Delft, the Netherlands

Abstract

As part of the ongoing key comparison BIPM.QM-K1, a comparison has been performed between the ozone standard of the Netherlands maintained by the Van Swinden Laboratorium (VSL) and the common reference standard of the key comparison, maintained by the Bureau International des Poids et Mesures (BIPM). The instruments have been compared over a nominal ozone amount fraction range of 0 nmol mol⁻¹ to 500 nmol mol⁻¹.

Contents:

1. FIELD	2
2. SUBJECT	2
3. PARTICIPANTS	2
4. ORGANIZING BODY	2
5. RATIONALE	2
6. TERMS AND DEFINITIONS	2
7. MEASUREMENTS SCHEDULE	2
8. MEASUREMENT PROTOCOL	2
9. REPORTING MEASUREMENT RESULTS	4
10. POST COMPARISON CALCULATION	4
11. DEVIATIONS FROM THE COMPARISON PROTOCOL	4
12. MEASUREMENT STANDARDS	4
13. MEASUREMENT RESULTS AND UNCERTAINTIES	7
14. ANALYSIS OF THE MEASUREMENT RESULTS BY GENERALISED LEAST-SQUARE REGRESSION	7
15. DEGREES OF EQUIVALENCE	8
16. HISTORY OF COMPARISONS BETWEEN BIPM SRP27, SRP28 AND VSL UMEG26	9
17. SUMMARY OF PREVIOUS COMPARISONS INCLUDED IN BIPM.QM-K1	10
18. CONCLUSION	10
19. REFERENCES	10

* Author for correspondence. E-mail jviallon@bipm.org, Tel: +33 1 45 07 62 70, Fax: +33 1 45 07 20 21.

1. Field

Amount of substance.

2. Subject

Comparison of reference measurement standards for ozone at ambient level.

3. Participants

BIPM.QM-K1 is an ongoing key comparison, which is structured as an ongoing series of bilateral comparisons. The results of the comparison with the Van Swinden Laboratorium (VSL) are reported here.

4. Organizing body

BIPM.

5. Rationale

The ongoing key comparison BIPM.QM-K1 has been running since January 2007. It follows the pilot study CCQM-P28 that included 23 participants and was performed between July 2003 and February 2005 [1]. It is aimed at evaluating the degree of equivalence of ozone photometers that are maintained as national standards, or as primary standards within international networks for ambient ozone measurements. The reference value is determined using the NIST Standard Reference Photometer (BIPM-SRP27) maintained by the BIPM as a common reference.

6. Terms and definitions

- x_{nom} : nominal ozone amount fraction in dry air furnished by the ozone generator
- $x_{A,i}$: i th measurement of the nominal value x_{nom} by the photometer A.
- \bar{x}_A : the mean of N measurements of the nominal value x_{nom} measured by the photometer A: $\bar{x}_A = \frac{1}{N} \sum_{i=1}^N x_{A,i}$
- s_A : standard deviation of N measurements of the nominal value x_{nom} measured by the photometer A: $s_A^2 = \frac{1}{N-1} \sum_{i=1}^N (x_{A,i} - \bar{x}_A)^2$
- The result of the linear regression fit performed between two sets of data measured by the photometers A and B during a comparison is written: $x_A = a_{A,B}x_B + b_{A,B}$. With this notation, the photometer A is compared versus the photometer B. $a_{A,B}$ is dimensionless and $b_{A,B}$ is expressed in units of nmol mol^{-1} .

7. Measurements schedule

This is the fourth participation of VSL since 2007. Measurements reported in this report were performed on 17 April 2024 at the BIPM.

8. Measurement protocol

The comparison protocol is summarised in this section. The complete version can be downloaded from the BIPM website ([BIPM.QM-K1 protocol](#)).

This comparison was performed following protocol A, corresponding to a comparison between the VSL standard UMEG26 and the common reference standard BIPM-SRP27 maintained at the BIPM. A comparison between two (or more) ozone photometers consists of producing

ozone-air mixtures at different amount fractions over the required range and measuring these with the photometers.

8.1. Ozone generation

The same source of purified air is used for all the ozone photometers being compared. Starting from compressed ambient air, the purification system consisted of a first refrigeration dryer, a catalytic converter to burn residual oil, a second refrigeration dryer, a particulate filter to remove particles larger than 0.1 μm , an active coal filter, and a final zero air generator (AADCO 737R-12), which ensured that the amount fraction of ozone, hydrocarbons, and nitrogen oxides remaining in the air was below detectable limits. This final system also ensured a constant amount fraction of oxygen in air, which is important to generate constant ozone amount fractions in the ozone generator. The relative humidity of the reference air was monitored and the amount fraction of water in air was typically found to be less than 3 $\mu\text{mol mol}^{-1}$.

Ozone in air mixtures were produced from the purified air inside the ozone generator (EnviroNics) equipped with a UV lamp to enable the photolysis of oxygen at a wavelength of 185 nm. To obtain a range of ozone amount fractions, the UV lamp intensity was tuned at appropriate levels. These actions were all controlled by the SRP operating software.

A common dual external Pyrex manifold was used to furnish the necessary flows of reference air and ozone-air mixtures to the ozone photometers. The two columns of this manifold were vented to atmospheric pressure. The same length of Teflon tubing was used to deliver both gas flows to all photometers under comparison, ensuring that they all received homogenized samples and reference air.

8.2. Comparison procedure

Prior to the comparison, all the instruments were switched on and allowed to stabilise for at least 8 hours. The pressure and temperature measurement systems of the instruments were checked at this time. If any adjustments were required, these were noted.

For this comparison, adjustment of the pressure probe of BIPM-SRP27 was necessary, based on the local standard. No adjustment was necessary for the VSL standard UMEG26, as reported in BIPM.QM-K1-R1-VSL-2024.

One comparison run includes ten different amount fractions of ozone distributed to cover the range, together with the measurement of reference air at the beginning and end of each run. The nominal amount fractions were measured in a sequence imposed by the protocol (0, 220, 80, 420, 120, 320, 30, 370, 170, 500, 270, and 0) nmol mol^{-1} . Each of these points is an average of ten single measurements.

For each nominal value of the ozone amount fraction x_{nom} furnished by the ozone generator, the standard deviation s_{SRP27} on the set of 10 consecutive measurements $x_{\text{SRP27},i}$ recorded by BIPM-SRP27 was calculated. The measurement results were considered as valid if s_{SRP27} was less than 1 nmol mol^{-1} , which ensures that the photometers were measuring a stable ozone concentration. If not, another series of 10 consecutive measurements was performed.

8.3. Comparison repeatability

The comparison procedure was repeated continuously to evaluate its repeatability. The participant and the BIPM commonly decided when both instruments were stable enough to start recording a set of measurement results to be considered as the official comparison results.

8.4. SRP27 stability check

A second ozone reference standard, BIPM-SRP28, was included in the comparison to verify its agreement with BIPM-SRP27 and thus follow its stability over the period of the ongoing key comparison.

9. Reporting measurement results

The participant and the BIPM staff reported the measurement results in the result form BIPM.QM-K1-R1 provided by the BIPM and available on the BIPM website. It includes details on the comparison conditions, measurement results and associated uncertainties, as well as the standard deviation for each series of 10 ozone amount fractions measured by the participant's standard and the common reference standard. The completed form BIPM.QM-K1-R1-VSL-2024 is given in appendix 1.

10. Post comparison calculation

All calculations were performed by the BIPM using the form BIPM.QM-K1-R1. It includes the two degrees of equivalence that are reported as comparison results in the Appendix B of the BIPM KCDB (key comparison database). Additionally, the degrees of equivalence at all nominal ozone amount fractions are reported in the same form, as well as the linear relationship between the participant standard and the common reference standard.

11. Deviations from the comparison protocol

There was no deviation from the protocol in this comparison.

12. Measurement standards

The instruments maintained by the BIPM is a Standard Reference Photometers (SRP) built by the NIST. More details on the instrument's principle and its capabilities can be found in [2].

The instrument maintained by VSL is a commercial ozone photometer manufactured by LUBW (formerly UMEG). Its serial number is UMEG-26. Both instruments run on the same principle. They differ by some technical choices, the main one being the presence of only one gas cell in the UMEG26, whereas the NIST-SRP includes two. The following section describes briefly both instruments' measurement principle and their uncertainty budgets.

12.1. Measurement equation of a NIST SRP

The measurement of the ozone amount fraction by an SRP is based on the absorption of radiation at 253.7 nm by ozonized air in the gas cells of the instrument. One particularity of the instrument design is the use of two gas cells to overcome the instability of the light source. The measurement equation is derived from the Beer-Lambert and ideal gas laws. The number density (C_{O_3}) of ozone is calculated from:

$$C_{O_3} = \frac{-1}{2\sigma L_{opt}} \frac{T_{\square} P_{std}}{T_{std} P_{\square}} \ln(D) \quad (1)$$

where

- σ is the absorption cross-section per molecule of ozone at 253.7 nm under standard conditions of temperature and pressure, $1.1476 \times 10^{-17} \text{ cm}^2$ [3].
- L_{opt} is the mean optical path length of the two cells;
- T is the measured temperature of the cells;
- T_{std} is the standard temperature (273.15 K);
- P is the measured pressure of the cells;

P_{std} is the standard pressure (101.325 kPa);
 D is the product of transmittances of two cells, with the transmittance (T_r) of one cell defined as

$$T_r = \frac{I_{\text{ozone}}}{I_{\text{air}}} \quad (2)$$

where

I_{ozone} is the UV radiation intensity measured from the cell when containing ozonized air,
and
 I_{air} is the UV radiation intensity measured from the cell when containing pure air (also called reference or zero air).

Using the ideal gas law equation (1) can be recast in order to obtain the amount fraction (x) of ozone in air:

$$x = \frac{-1}{2\sigma L_{\text{opt}}} \frac{T_{\text{r}} R}{P_{\text{std}} N_A} \ln(D) \quad (3)$$

where

N_A is the Avogadro constant, $6.022\,140\,76 \times 10^{23}$ molecule/mol
 R is the gas constant, $82.057\,366 \text{ cm}^3 \text{ atm mol}^{-1} \text{ K}^{-1}$

The formulation implemented in the SRP software, although equivalent in terms of the measurement results, differs from the above in the choice of a unit system based on the “atm” (atmosphere) as unit for the pressure, rather than the SI-unit. As explained in detail in [4], the “atm” unit system was used initially to describe the operation of ozone photometers and, though antiquated, remains in use by many practitioners. In this system, the amount fraction of ozone x is calculated from:

$$x = \frac{-1}{2\alpha_0 L_{\text{opt}}} \frac{T}{T_{\text{std}}} \frac{P_{\text{std}}}{P} \ln(D) \quad (4)$$

where

α_0 is the absorption coefficient at standard temperature and pressure (0 °C and 1 atm), expressed in $\text{atm}^{-1} \text{ cm}^{-1}$, and linked to the absorption cross-section per molecule σ via the Boltzmann constant $k_B = 1.380\,649 \times 10^{-23} \text{ J K}^{-1}$ with the relation:

$$\alpha_0 = \frac{\sigma}{k_B T_{\text{std}}} \quad (5)$$

12.2. Absorption cross-section for ozone

The absorption coefficient under standard conditions α_0 used within the SRP software algorithm is 308.32 cm^{-1} . This corresponds to a value for the absorption cross section σ of $1.1476 \times 10^{-17} \text{ cm}^2$, rather than the more often quoted $1.147 \times 10^{-17} \text{ cm}^2$ reported by Hearn in 1961 [5]. The CCQM recommended in 2020 [6] that a new value for the ozone absorption cross section be used in the on-going key comparison BIPM.QM-K1 and in all ozone photometers acting as ozone standards. A CCQM Task Group was created in 2020 to manage the synchronous change of ozone cross-section worldwide, with the aim to implement the new, consensus value, named CCQM.O3.2019 proposed by Hodges *et al.* [7], within the next 3 to 5 years.

In the comparison of two SRP instruments, the absorption cross-section can be considered to have a conventional value and its uncertainty can be set to zero. However, in the comparison of different methods or when considering the complete uncertainty budget of the method the uncertainty of the absorption cross-section should be taken into account.

12.3. Condition of the BIPM SRPs

SRP27 and SRP28 were built in 2002. Compared to the original design described in [2], both instruments have been modified to deal with two biases revealed by the study conducted by the BIPM and the NIST in 2006 [8]. In 2009, an ‘‘SRP upgrade kit’’ was installed in the instruments [9]. In 2021, their electronic modules were upgraded. Negligible impact on their measurement results was demonstrated [10].

12.4. Uncertainty budget of the common reference BIPM-SRP27

The uncertainty budget for the ozone amount fraction in dry air (x) measured by the instruments BIPM-SRP27 and BIPM-SRP28 in the nominal range 0 nmol mol⁻¹ to 500 nmol mol⁻¹ is given in Table 1.

Table 1: Uncertainty budget for the SRPs maintained by the BIPM

Component (y)	Uncertainty $u(y)$				Sensitivity coefficient $c_i = \frac{\partial x}{\partial y}$	contribution to $u(x)$ $ c_i \cdot u(y)$ nmol mol ⁻¹
	Source	Distribution	Standard Uncertainty	Combined standard uncertainty $u(y)$		
Optical Path L_{opt}	Measurement scale	Rectangular	0.0006 cm	0.52 cm	$-\frac{x}{L_{opt}}$	$2.89 \times 10^{-3}x$
	Repeatability	Normal	0.01 cm			
	Correction factor	Rectangular	0.52 cm			
Pressure P	Pressure gauge	Rectangular	0.029 kPa	0.034 kPa	$-\frac{x}{P}$	$3.37 \times 10^{-4}x$
	Difference between cells	Rectangular	0.017 kPa			
Temperature T	Temperature probe	Rectangular	0.03 K	0.07 K	$\frac{x}{T}$	$2.29 \times 10^{-4}x$
	Temperature gradient	Rectangular	0.058 K			
Ratio of intensities D	Scaler resolution	Rectangular	8×10^{-6}	1.4×10^{-5}	$\frac{x}{D \ln(D)}$	0.28
	Repeatability	Triangular	1.1×10^{-5}			
Absorption Cross section per molecule σ	Hearn value		1.22×10^{-19} cm ²	1.22×10^{-19} cm ²	$-\frac{x}{\alpha}$	$1.06 \times 10^{-2}x$

Following this budget, as explained in the protocol of the comparison, the standard uncertainty associated with the ozone amount fraction measurement with the BIPM SRPs can be expressed as a numerical equation (numerical values expressed as nmol mol⁻¹):

$$u(x) = \sqrt{(0.28)^2 + (2.92 \cdot 10^{-3}x)^2} \quad (6)$$

12.5. Covariance terms for the common reference BIPM-SRP27

As explained in section 14, correlations in between the results of two measurements performed at two different ozone amount fractions with BIPM-SRP27 were taken into account in the software OzoneE. More details on the covariance expression can be found in the protocol. The following expression was applied:

$$u(x_i, x_j) = x_i \cdot x_j \cdot u_b^2 \quad (7)$$

where:

$$u_b^2 = \frac{u^2(T)}{T^2} + \frac{u^2(P)}{P^2} + \frac{u^2(L_{opt})}{L_{opt}^2} \quad (8)$$

The value of u_b is given by the expression of the measurement uncertainty: $u_b = 2.92 \times 10^{-3}$.

12.6. Condition of the VSL UMEG26

The UMEG26 maintained by VSL implements the same measurement principle as the NIST-SRP, with different technical choices. Compared to the last comparison in 2016, no changes have been made to the instrument [11].

12.7. Uncertainty budget of the VSL UMEG26

The uncertainty budget for the ozone mole fraction in dry air x measured by the VSL standard UMEG26 in the nominal range 0 nmol/mol to 500 nmol/mol is given in Table 2.

Following this budget, as explained in the protocol of the comparison, the standard uncertainty associated with the ozone mole fraction measurement with the VSL UMEG26 can be expressed as a numerical equation (numerical values expressed as nmol/mol):

$$u(x) = \sqrt{(0.35)^2 + (0.0015x)^2 + (0.00051x)^2 + (0.0019x)^2} \quad (9)$$

No covariance term for the VSL standard UMEG26 was included in the calculations.

Table 2: UMEG26 uncertainty budget

component x_i	Value	distribution	Standard uncertainty $u(x_i)$	Sensitivity coefficient $\partial y/\partial x_i$	Contribution $u_i(C)$
p	101.325 kPa	normal	1.5 hPa	$-x/P$	$0.0015x$
T	301.00 K	normal	0.153 K	x/T	$0.00051x$
L_{cell}	2.655 m	normal	0.005 m	$-x/L$	$0.0019x$
α	$1.34 \text{ atm}^{-1} \cdot \text{m}^{-1}$	normal	$0.01 \text{ atm}^{-1} \cdot \text{m}^{-1}$	x/α	Not relevant here
$I_{reading}$	reading	normal	0.35 ppb	1	0.35 ppb
Interf.	0 ppb	normal	0 ppb	1	0 ppb

No covariance term for the VSL UMEG26 was included in the calculations.

13. Measurement results and uncertainties

Details of the measurement results, the measurement uncertainties and the standard deviations at each nominal ozone amount fraction can be found in the form BIPM.QM-K1-R1-VSL-2024 given in appendix 1.

14. Analysis of the measurement results by generalised least-square regression

The relationship between the national and reference standards was first evaluated with a generalised least-square regression fit, using the software OzonE. This software, which is documented in a publication [12], is an extension of the previously used software B_Least

recommended by ISO 6143:2001 [13]. It includes the possibility to take into account correlations between measurements performed with the same instrument at different ozone amount fractions.

In a direct comparison, a linear relationship between the ozone amount fractions measured by the instrument i and SRP27 is obtained:

$$x_i = a_0 + a_1 x_{\text{SRP27}} \quad (10)$$

The associated uncertainties on the slope $u(a_1)$ and the intercept $u(a_0)$ are given by OzonE, as well as the covariance between them and the usual statistical parameters to validate the fitting function.

14.1. Least-square regression results

The relationship between UMEG26 and SRP27 is:

$$x_{\text{UMEG26}} = -0.08 \text{ nmol mol}^{-1} + 0.9995 x_{\text{SRP27}} \quad (11)$$

The standard uncertainties on the parameters of the regression are $u(a_1) = 0.0033$ for the slope and $u(a_0) = 0.24 \text{ nmol mol}^{-1}$ for the intercept. The covariance between the two parameters is $\text{cov}(a_0, a_1) = -2.38 \times 10^{-4}$.

The least-squares regression results confirm that a linear fit is appropriate, with a sum of the squared deviations (SSD) of 0.44 and a goodness of fit (GoF) equals to 0.24.

To assess the agreement of the standards using equations 11 and 12, the difference between the calculated slope value and unity, and the intercept value and zero, together with their measurement uncertainties need to be considered. In this comparison, the value of the intercept is consistent with an intercept of zero, considering the uncertainty in the value of this parameter; i.e. $|a_0| < 2u(a_0)$, and the value of the slope is consistent with a slope of 1; i.e. $|1 - a_1| < 2u(a_1)$.

15. Degrees of equivalence

Degrees of equivalence are calculated at two nominal ozone amount fractions among the twelve measured in each comparison, in the nominal range 0 nmol mol^{-1} to $500 \text{ nmol mol}^{-1}$: 80 nmol mol^{-1} and $420 \text{ nmol mol}^{-1}$. These values correspond to points number 3 and 4 recorded in each comparison. As an ozone generator has limited reproducibility, the ozone amount fractions measured by the ozone standards can differ from the nominal values. However, as stated in the protocol, the value measured by the common reference SRP27 was expected to be within $\pm 15 \text{ nmol mol}^{-1}$ of the nominal value. Hence, it is meaningful to compare the degree of equivalence calculated for all the participants at the same nominal value.

15.1. Definition of the degrees of equivalence

The degree of equivalence of the participant i , at a nominal value x_{nom} is defined as:

$$D_i = x_i - x_{\text{SRP27}} \quad (12)$$

where x_i and x_{SRP27} are the measurement result of the participant i and of SRP27 at the nominal value x_{nom} .

Its associated standard uncertainty is:

$$u(D_i) = \sqrt{u_i^2 + u_{\text{SRP27}}^2} \quad (13)$$

where u_i and u_{SRP27} are the measurement uncertainties of the participant i and of SRP27 respectively.

15.2. Values of the degrees of equivalence

The degrees of equivalence and their uncertainties calculated in the form BIPM.QM-K1-R1-VSL-2024 are reported in the table below. Corresponding graphs of equivalence are displayed in Figure 1. The expanded uncertainties are calculated with a coverage factor $k = 2$.

Table 3: Degrees of equivalence of VSL at the ozone nominal amount fractions 80 nmol mol⁻¹ and 420 nmol mol⁻¹

Nominal value	$x_i /$	$u_i /$	$x_{\text{SRP27}} /$	$u_{\text{SRP27}} /$	$D_i /$	$u(D_i) /$	$U(D_i) /$
	(nmol mol ⁻¹)	(nmol mol ⁻¹)	(nmol mol ⁻¹)	(nmol mol ⁻¹)	(nmol mol ⁻¹)	(nmol mol ⁻¹)	(nmol mol ⁻¹)
80	83.00	0.41	83.19	0.37	-0.20	0.55	1.10
420	420.04	1.10	419.89	1.26	0.15	1.67	3.34

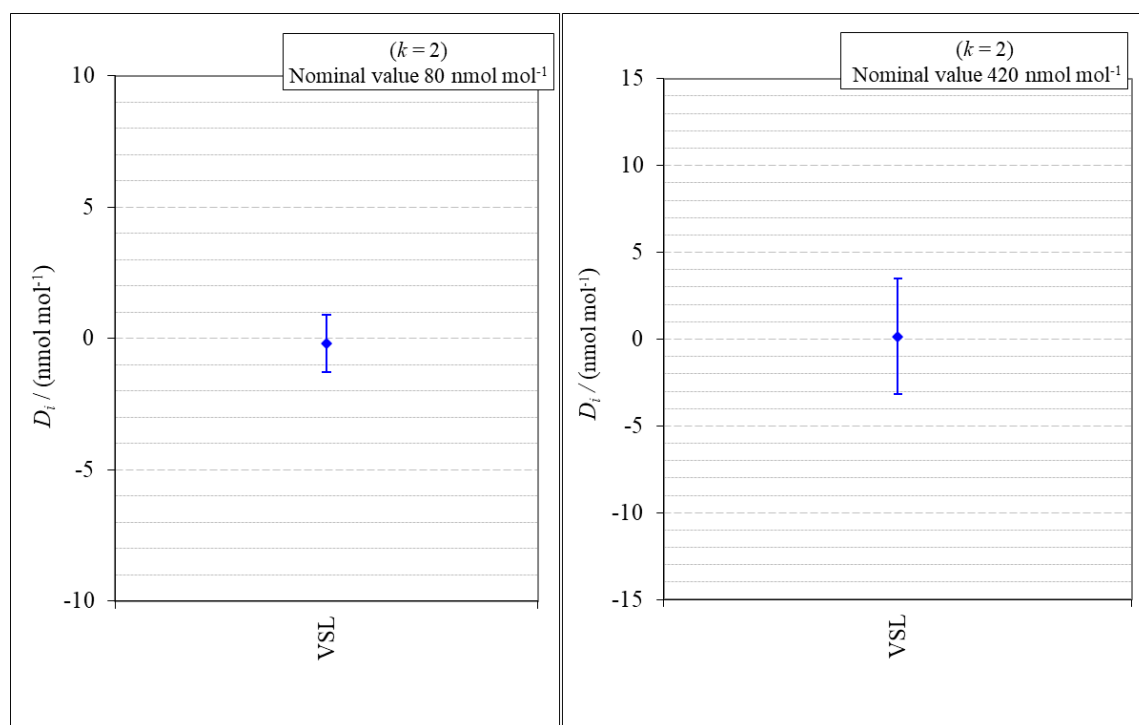


Figure 1: Degrees of equivalence of VSL at the two nominal ozone amount fractions 80 nmol mol⁻¹ and 420 nmol mol⁻¹

The degrees of equivalence between the VSL standard and the common reference standard BIPM SRP27 indicate good agreement between the standards. A discussion on the relation between degrees of equivalence and CMC statements can be found in [1].

16. History of comparisons between BIPM SRP27, SRP28 and VSL UMEG26

Results of the previous comparison performed with VSL are displayed in Figure 2 together with the results of this comparison. The slopes a_1 of the linear relation $x_{\text{SRP}n} = a_0 + a_1 x_{\text{SRP27}}$ are represented together with their associated uncertainties calculated at the time of each

comparison. Figure 2 shows that all standards included in these comparisons stayed in close agreement.

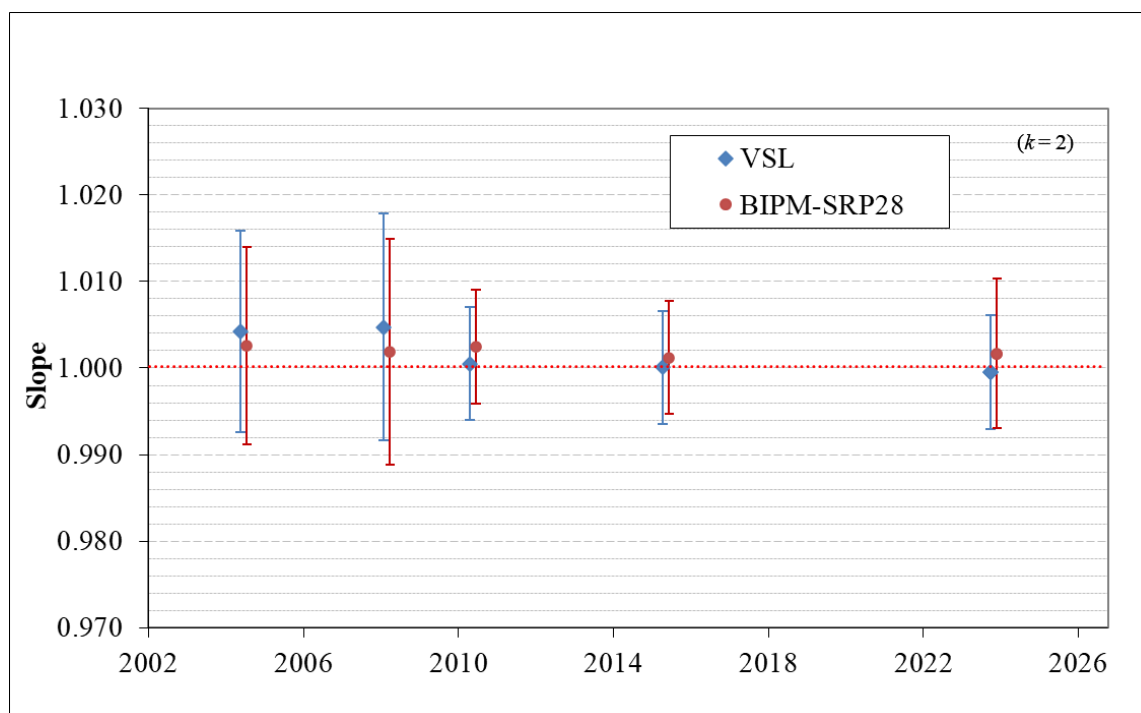


Figure 2: Results of previous comparisons between SRP27, SRP28 and VSL-UMEG26 realised at the BIPM. Uncertainties are calculated at $k = 2$, with the uncertainty budget in use at the time of each comparison.

17. Summary of previous comparisons included in BIPM.QM-K1

The comparison with VSL is the fourth one since the start of BIPM.QM-K1 in 2007. An updated summary of BIPM.QM-K1 results can be found in the key comparison database: <http://kcdb.bipm.org/appendixB/>.

18. Conclusion

For the fourth time since the launch of the ongoing key comparison BIPM.QM-K1, a comparison has been performed between the ozone standard of the Netherlands, maintained by VSL, and the common reference standard of the key comparison, maintained by the BIPM. The instruments have been compared over a nominal ozone amount fraction range of 0 nmol mol⁻¹ to 500 nmol mol⁻¹. Degrees of equivalence of this comparison indicated very good agreement between both standards.

19. References

- [1] Viallon J., Moussay P., Esler M., Wielgosz R., Bremser W., Novák J., Vokoun M., Botha A., Janse Van Rensburg M., Zellweger C., et al., 2006, PILOT STUDY: International Comparison CCQM-P28: Ozone at ambient level, *Metrologia*, **43**, *Tech. Suppl.*, 08010, <https://doi.org/10.1088/0026-1394/43/1A/08010>
- [2] Paur R.J., Bass A.M., Norris J.E. and Buckley T.J. NIST 2003 Standard reference photometer for the assay of ozone in calibration atmospheres *Env. Sci. Technol.* **NISTIR 6369**, February 2003, p 25
- [3] ISO 13964:1996 Ambient air - Determination of ozone - Ultraviolet photometric method (International Organization for Standardization)

- [4] Davis R.S., Niederhauser B., Hodges J.T., Viallon J. and Wielgosz R.I. BIPM 2022 Units and values for the ozone absorption cross section at 253.65 nm (air) with appropriate significant digits and rounding for use in documentary standards **Rapport BIPM-2022/02** p 16, <https://doi.org/10.59161/Rapport202202>
- [5] Hearn A.G., 1961, The absorption of ozone in the ultra-violet and visible regions of the spectrum, *Proc. Phys. Soc.*, **78**, 932-940, <http://www.iop.org/EJ/abstract/0370-1328/78/5/340>
- [6] Recommendation 1 (2020): On the recommended value of the ozone absorption cross section per molecule at 253.65 nm (air) for applications including the measurement of atmospheric ozone amount fractions, [https://www.bipm.org/documents/20126/43885127/CCQM20-30 CCQM recommendation on Ozone X-Section Final Approved.docx.pdf/9ea02056-4a7c-b2d3-b1ea-9a9903e91fdd](https://www.bipm.org/documents/20126/43885127/CCQM20-30_CCQM_recommendation_on_Ozone_X-Section_Final_Approved.docx.pdf/9ea02056-4a7c-b2d3-b1ea-9a9903e91fdd) 2022-03-22
- [7] Hodges J.T., Viallon J., Brewer P.J., Drouin B.J., Gorshelev V., Janssen C., Lee S., Possolo A., Smith M.A.H., Walden J., et al., 2019, Recommendation of a consensus value of the ozone absorption cross-section at 253.65 nm based on a literature review, *Metrologia*, **56**, 034001, <https://doi.org/10.1088/1681-7575/ab0bdd>
- [8] Viallon J., Moussay P., Norris J.E., Guenther F.R. and Wielgosz R.I., 2006, A study of systematic biases and measurement uncertainties in ozone mole fraction measurements with the NIST Standard Reference Photometer, *Metrologia*, **43**, 441-450, <https://doi.org/10.1088/0026-1394/43/5/016>
- [9] Viallon J., Moussay P., Idrees F. and Wielgosz R.I. BIPM 2010 Upgrade of the BIPM Standard Reference Photometers for Ozone and the effect on the on-going key comparison BIPM.QM-K1 **Rapport BIPM-2010/07** p 16,
- [10] Viallon J., Moussay P., Idrees F. and Wielgosz R.I. BIPM 2022 Upgrade of the electronics modules of the BIPM Standard Reference Photometers for ozone and the effect on the on-going key comparison BIPM.QM-K1 **Rapport BIPM-2022/01** p 8, <https://doi.org/10.59161/Rapport202201>
- [11] Viallon J., Moussay P., Idrees F., Wielgosz R., Heikens D. and Veen A.v.d., 2017, Final report, on-going key comparison BIPM.QM-K1, ozone at ambient level, comparison with VSL, September 2016, *Metrologia*, **54**, 08025, <http://stacks.iop.org/0026-1394/54/i=1A/a=08025>
- [12] Bremser W., Viallon J. and Wielgosz R.I., 2007, Influence of correlation on the assessment of measurement result compatibility over a dynamic range, *Metrologia*, **44**, 495-504, <https://doi.org/10.1088/0026-1394/44/6/009>
- [13] ISO 6143:2001 Gas analysis - Comparison methods for determining and checking the composition of calibration gas mixtures (International Organization for Standardization)

Appendix 1 - Form BIPM.QM-K1-R1-VSL-2024

See the following pages.

OZONE COMPARISON RESULT - PROTOCOL A - DIRECT COMPARISON

Participating institute information	
Institute	VSL
Address	Thijsseweg 11 2629 JA DELFT NETHERLANDS
Contact	Luuk Meijer
Email	lmeijer@vsl.nl
Telephone	+31631119904

Instruments information		
	Reference Standard	National Standard
Manufacturer	NIST	VSL
Type	SRP	UMEG
Serial number	SRP27	26

Content of the report	
page 1	general informations
page 2	comparison results
page 3	measurements results
page 4	comparison description
page 5	uncertainty budgets

comparison reference standard (RS) - national standard (NS)

Operator	F. Idrees	Location	BIPM-MC-CHEM9
Comparison begin date / time	2024-04-17 09:42	Comparison end date / time	2024-04-17 11:47

Comparison results

Equation $x_{NS} = a_1 x_{RS} + a_0$


Least-square regression parameters

a_1	$u(a_1)$	a_0 (nmol/mol)	$u(a_0)$ (nmol/mol)	$u(a_1, a_0)$
0.9995	0.0033	-0.08	0.24	-2.38E-04

(Least-square regression parameters will be computed by the BIPM using the software OzonE v2.0)

Degrees of equivalence at 80 nmol/mol and 420 nmol/mol:

Nom value (nmol/mol)	D_i (nmol/mol)	$u(D_i)$ (nmol/mol)	$U(D_i)$ (nmol/mol)
80	-0.20	0.55	1.10
420	0.15	1.67	3.34

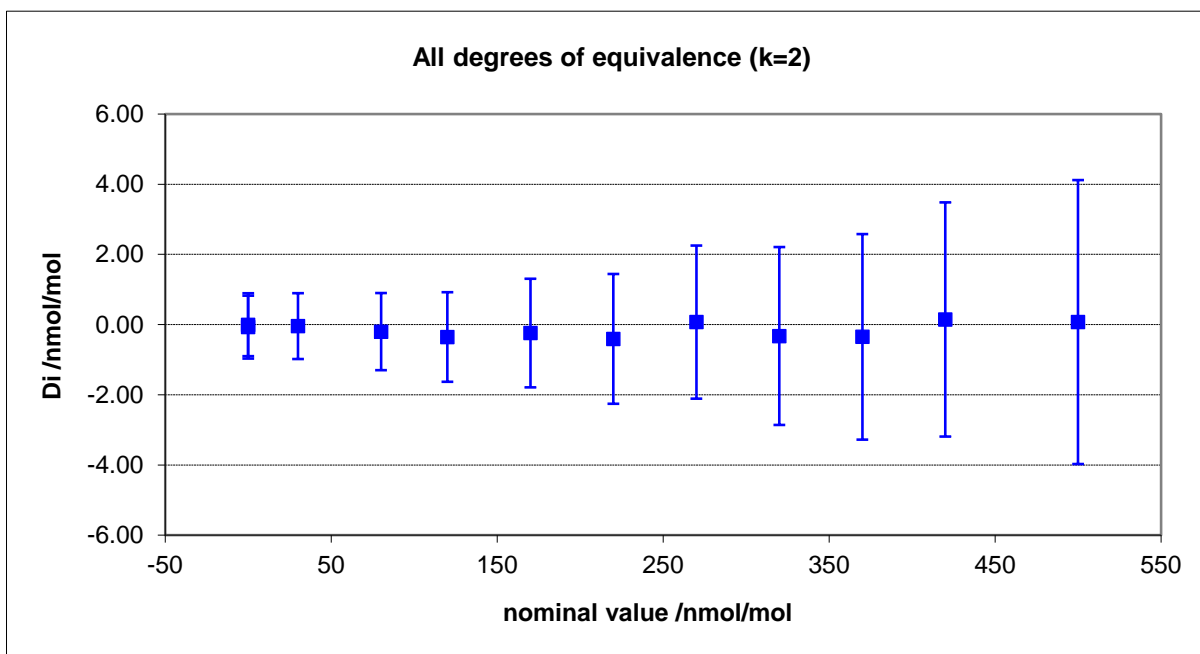

Measurement results						
	Reference Standard (RS)			National standard (NS)		
Nominal value	x_{RS} nmol/mol	s_{RS} nmol/mol	$u(x_{RS})$ nmol/mol	x_{NS} nmol/mol	s_{NS} nmol/mol	$u(x_{NS})$ nmol/mol
0	0.00	0.12	0.28	0.00	0.33	0.35
220	211.54	0.25	0.68	211.13	0.47	0.63
80	83.19	0.24	0.37	83.00	0.58	0.41
420	419.89	0.14	1.26	420.04	0.37	1.10
120	118.85	0.25	0.45	118.49	0.47	0.46
320	309.93	0.24	0.95	309.61	0.85	0.84
30	36.23	0.23	0.30	36.19	0.22	0.36
370	364.45	0.23	1.10	364.10	0.38	0.97
170	164.92	0.43	0.56	164.68	0.74	0.54
500	515.50	0.31	1.53	515.57	0.73	1.32
270	259.83	0.29	0.81	259.91	0.34	0.73
0	0.14	0.22	0.28	0.07	0.51	0.35

Degrees of Equivalence				
Point Number	Nom value (nmol/mol)	D_i (nmol/mol)	$u(D_i)$ (nmol/mol)	$U(D_i)$ (nmol/mol)
1	0	0.00	0.45	0.90
2	220	-0.41	0.92	1.85
3	80	-0.20	0.55	1.10
4	420	0.15	1.67	3.34
5	120	-0.35	0.64	1.28
6	320	-0.32	1.27	2.54
7	30	-0.04	0.47	0.94
8	370	-0.35	1.46	2.93
9	170	-0.24	0.77	1.55
10	500	0.07	2.02	4.05
11	270	0.07	1.09	2.18
12	0	-0.07	0.45	0.90

Covariance terms in between two measurement results of each standard

Equation $u(x_i, x_j) = \alpha \cdot x_i \cdot x_j$

Value of α for the reference standard 8.58E-06

Value of α for the national standard 0.00E+00

Comparison conditions	
Ozone generator manufacturer	Environics
Ozone generator type	Model 6100
Ozone generator serial number	3128
Room temperature(min-max) / °C	23.5 - 23.7
Room pressure (min-max) / hpa	1005.7 - 1006.2
Zero air source	compressor + BekoKAT + dryer+ aadco 737-R
Reference air flow rate (L/min)	14
Sample flow rate (L/min)	10
Instruments stabilisation time	> 8 hours
Instruments acquisition time /s (one measurement)	5 s
Instruments averaging time /s	5 s
Total time for ozone conditioning	>12 hours
Ozone mole fraction during conditioning	600 nmol/mol
Comparison repeated continuously (Yes/No)	Yes
If no, ozone mole fraction in between the comparison repeats	
Total number of comparison repeats realised	3
Data files names and location	G:\Gas\Ozone\BIPM.QM-K1\Participants results\2404 VSL Cal24041600.xls to Cal24041700.xls

Instruments checks and adjustments

Reference Standard

Pressure adjusted through O3Conductor using PS5 sensor as pressure reference

National Standard

Adjustments performed by L. Meijer.
 Data recorded by L. Meijer in an Excel file, transferred and integrated to the output file of O3Conductor (checked by L. Meijer and F. Idrees)

Uncertainty budgets (description or reference)

Reference Standard

BIPM-SRP27 uncertainty budget is described in the protocol of this comparison: document BIPM.QM-K1 protocol, date 10 Januray 2007, available on BIPM website. It can be summarised by the formula:

$$u(x) = \sqrt{(0.28)^2 + (2,92 \cdot 10^{-3} x)^2}$$

National Standard

The uncertainty budget for the ozone mole fraction in dry air x measured by VSL standard UMEG-26 in the nominal range 0 nmol/mol to 500 nmol/mol is given in the table below. More information is provided in appendix 1 of the main report.

Following this budget, the standard uncertainty associated with the ozone mole fraction measurement with the UMEG-26 can be expressed as a numerical equation (numerical values expressed as nmol/mol):

$$u_c = \sqrt{(0.35)^2 + (0.0015x)^2 + (0.00051x)^2 + (0.0019x)^2}$$

where

x is the ozone mole fraction in nmol.mol-1.

component x_i	Value	distribution	Standard uncertainty $u(x_i)$	Sensitivity coefficient $\partial y / \partial x_i$	Contribution $u_i(C)$
p	101.325 kPa	normal	1.5 hPa	$-x/P$	0.0015x
T	301.00 K	normal	0.153 K	x/T	0.00051x
L_{cell}	2.655 m	normal	0.005 m	$-x/L$	0.0019x
α	1.34 atm ⁻¹ .m ⁻¹	normal	0.01 atm ⁻¹ .m ⁻¹	x/α	Not relevant here
$I_{reading}$	reading	normal	0.35 ppb	1	0.35 ppb
Interf.	0 ppb	normal	0 ppb	1	0 ppb